

QDSP-2000 Series

0.6-Liter Box PC with Intel® Haswell ULT Processor

User's Guide



Content

Content.....	2
Figures & Tables.....	3
Safety Instructions.....	4
Before You Begin	4
When Working Inside a Computer	5
Preventing Electrostatic Discharge	5
Instructions for Lithium Battery	6
Voltage Ratings.....	6
Preface.....	7
How to Use This Guide	7
Unpacking.....	7
Regulatory Compliance Statements.....	7
Maintaining Your Computer.....	8
Chapter 1 Introduction	11
Overview.....	11
System tour.....	13
Mechanical Dimensions	15
Chapter 2 Getting Started	16
Setting up your PC.....	16
Mounting your PC to a monitor	19
Anti-theft protection with a Kensington Lock.....	20
Chapter 3 AMI BIOS Setup.....	21
Overview.....	21
Main Menu	22
Advanced Menu	23
Boot Menu	31
Security Menu.....	32
Save & Exit Menu	33
Chapter 4 Driver Installation	35

Figures & Tables

Figure 1 Front Panel	13
Figure 2 Rear Panel.....	14
Figure 3 Mechanical Dimensions	15
Figure 4 DP/ HDMI.....	16
Figure 5 Connecting USB mouse & keyboard.....	17
Figure 6 RJ45 connector.....	17
Figure 7 Turning on the system	18
Figure 8 VESA mounting.....	19
Figure 9 Use a Kensington lock	20
Table 1 QDSP-2000 series product specification	12
Table 2 BIOS Main Menu	22
Table 3 Advanced Menu.....	23
Table 4 Advanced Menu – Display Configuration.....	24
Table 5 Advanced Menu –CPU Chipset Configuration.....	25
Table 6 Advanced Menu –SATA Configuration.....	26
Table 7 Advanced Menu –USB Configuration	27
Table 8 Advanced Menu –Intel (R) Rapid Start Technology	28
Table 9 Advanced Menu –TPM Configuration	28
Table 10 Advanced Menu –H/W Monitor	29
Table 11 Power Management Configuration	30
Table 12 Boot Menu	31
Table 13 Security Menu	32
Table 14 Save & Exit Menu	33

Safety Instructions

■ Before You Begin

Before handling the product, read the instructions and safety guidelines on the following pages to prevent damage to the product and to ensure your own personal safety. Refer to the “Advisories” section in the Preface for advisory conventions used in this user’s guide, including the distinction between Warnings, Cautions, Important Notes, and Notes.

- Always use caution when handling/operating a computer. Only qualified, experienced, authorized electronics service personnel should access the interior of a computer. The power supplies produce high voltages and energy hazards, which can cause bodily harm.
- Use extreme caution when installing or removing components. Refer to the installation instructions in this user’s guide for precautions and procedures. If you have any questions, please contact our Post-Sales Technical Support.
- Access can only be gained by service persons or by users who have been instructed about the reasons for the restrictions applied to the location and about any precautions that shall be taken; and access is through the use of a tool or lock and key, or other means of security, and is controlled by authority responsible for the location.

WARNING



High voltages are present inside the chassis when the unit’s power cord is plugged into an electrical outlet. Turn off system power, turn off the power supply, and then disconnect the power cord from its source before removing the chassis cover. Turning off the system power switch does not remove power to components.

■ When Working Inside a Computer

Before taking covers off a computer, perform the following steps:

1. Turn off the computer and any peripherals.
2. Disconnect the computer and peripherals from their power sources or subsystems to prevent electric shock or system board damage. This does not apply when hot swapping parts.
3. Follow the guidelines provided in “Preventing Electrostatic Discharge” on the following page.
4. Disconnect any telephone or telecommunications lines from the computer.

In addition, take note of these safety guidelines when appropriate:

- To help avoid possible damage to system boards, wait five seconds after turning off the computer before removing a component, removing a system board, or disconnecting a peripheral device from the computer.
- When you disconnect a cable, pull on its connector or on its strain-relief loop, not on the cable itself. Some cables have a connector with locking tabs. If you are disconnecting this type of cable, press in on the locking tabs before disconnecting the cable. As you pull connectors apart, keep them evenly aligned to avoid bending any connector pins. Also, before connecting a cable, make sure both connectors are correctly oriented and aligned.



CAUTION

Do not attempt to service the system yourself except as explained in this user's guide. Follow installation and troubleshooting instructions closely.

■ Preventing Electrostatic Discharge

Static electricity can harm system boards. Perform service at an ESD workstation and follow proper ESD procedure to reduce the risk of damage to components. We strongly encourage you to follow proper ESD procedure, which can include wrist straps and smocks, when servicing equipment.

You can also take the following steps to prevent damage from electrostatic discharge (ESD):

- When unpacking a static-sensitive component from its shipping carton, do not

remove the component's antistatic packing material until you are ready to install the component in a computer. Just before unwrapping the antistatic packaging, be sure you are at an ESD workstation or grounded. This will discharge any static electricity that may have built up in your body.

- When transporting a sensitive component, first place it in an antistatic container or packaging.
- Handle all sensitive components at an ESD workstation. If possible, use antistatic floor pads and workbench pads.
- Handle components and boards with care. Don't touch the components or contacts on a board. Hold a board by its edges or by its metal mounting bracket.
- Do not handle or store system boards near strong electrostatic, electromagnetic, magnetic, or radioactive fields.

■ Instructions for Lithium Battery



WARNING

Danger of explosion when battery is replaced with incorrect type. Only replace with the same or equivalent type recommended by the manufacturer.

Do not dispose of lithium batteries in domestic waste. Dispose of the battery according to the local regulations dealing with the disposal of these special materials (e.g. to the collecting points for disposal of batteries)

■ Voltage Ratings

The external power adaptor of the QDSP-2000 has the following voltage ratings:

- Input: 100-240 VAC, 50-60 Hz
- Output: 65W, +19VDC/3.42A output

Preface

■ How to Use This Guide

This guide is designed to be used as step-by-step instructions for installation, and as a reference for operation, troubleshooting, and upgrades.

■ Unpacking

When unpacking, follow these steps:

1. After opening the box, save it and the packing material for possible future shipment.
2. Remove all items from the box. If any items listed on the purchase order are missing, notify our customer service immediately.
3. Inspect the product for damage. If there is damage, notify our customer service immediately. Refer to “Warranty Policy” for the return procedure.

■ Regulatory Compliance Statements

This section provides the FCC compliance statement for Class B devices.

FCC Compliance Statement:

This equipment has been tested and found to comply with limits for a Class B digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in residential installations. This equipment generates, uses, and can radiate radiofrequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause interference to radio or television equipment reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the

receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by us could void the user's authority to operate the equipment.

NOTE



The assembler of a personal computer system may be required to test the system and/or make necessary modifications if a system is found to cause harmful interference or to be noncompliant with the appropriate standards for its intended use.

■ Maintaining Your Computer

Environmental Factors

■ Temperature

The ambient temperature within an enclosure may be greater than room ambient temperature. Installation in an enclosure should be such that the amount of air flow required for safe operation is not compromised.

Consideration should be given to the maximum rated ambient temperature.

Overheating can cause a variety of problems, including premature aging and failure of chips or mechanical failure of devices.

If the system has been exposed to abnormally cold temperatures, allow a two-hour warm-up period to bring it up to normal operating temperature before turning it on. Failure to do so may cause damage to internal components, particularly the hard disk drive.

■ Humidity

High-humidity can cause moisture to enter and accumulate in the system. This moisture can cause corrosion of internal components and degrade such properties as electrical resistance and thermal conductivity. Extreme moisture buildup inside the system can result in electrical shorts, which can cause serious damage to the system.

Buildings in which climate is controlled usually maintain an acceptable level of humidity for system equipment. However, if a system is located in an unusually humid location, a dehumidifier can be used to maintain the humidity within an acceptable range. Refer to the "Specifications" section of this user's guide for

the operating and storage humidity specifications.

■ **Altitude**

Operating a system at a high altitude (low pressure) reduces the efficiency of the cooling fans to cool the system. This can cause electrical problems related to arcing and corona effects. This condition can also cause sealed components with internal pressure, such as electrolytic capacitors, to fail or perform at reduced efficiency.

Power Protection

The greatest threats to a system's supply of power are power loss, power spikes, and power surges caused by electrical storms, which interrupt system operation and/or damage system components. To protect your system, always properly ground power cables and one of the following devices.

■ **Surge Protector**

Surge protectors are available in a variety of types and usually provide a level of protection proportional with the cost of the device. Surge protectors prevent voltage spikes from entering a system through the AC power cord. Surge protectors, however, do not offer protection against brownouts, which occur when the voltage drops more than 20 percent below the normal AC line voltage level.

■ **Line Conditioner**

Line conditioners go beyond the overvoltage protection of surge protectors. Line conditioners keep a system's AC power source voltage at a fairly constant level and, therefore, can handle brownouts. Because of this added protection, line conditioners cost more than surge protectors. However, line conditioners cannot protect against a complete loss of power.

■ **Uninterruptible Power Supply**

Uninterruptible power supply (UPS) systems offer the most complete protection against variations on power because they use battery power to keep the server running when AC power is lost. The battery is charged by the AC power while it is available, so when AC power is lost, the battery can provide power to the system for a limited amount of time, depending on the UPS system.

UPS systems range in price from a few hundred dollars to several thousand dollars, with the more expensive units allowing you to run larger systems for a

longer period of time when AC power is lost. UPS systems that provide only 5 minutes of battery power let you conduct an orderly shutdown of the system, but are not intended to provide continued operation. Surge protectors should be used with all UPS systems, and the UPS system should be Underwriters Laboratories (UL) safety approved.

Chapter 1

Introduction

■ Overview

The QDSP-2000 series is a Box PC that is ideal for space critical applications. This embedded hardware platform is designed with Intel® Haswell ULT processor which provides with excellent performance.

System is supported with DDR3L SO-DIMM up to 8GB. Featured are GbE, USB3.0, USB2.0,HDMI, and DVI-D..

Checklist

- QDSP-2000 series
- Power Adapter
- Power Cord
- Driver CD
- Quick installation Guide
- VESA Mounting Kit (optional)
- Wireless LAN, 3G (optional)

Features

- Intel® Haswell ULT Processor
- Support 1x DDR3L SO-DIMM up to 8GB
- Support 1xDVI-D, 1xHDMI
- Support 2xGbE, 4x USB3.0, 2x USB 2.0 and Audio
- Support 1x HDD / SSD / mSATA

Product Specifications

Construction	Aluminum
CPU	QDSP-2000: Intel® Core™ i3-4010U Processor (3M Cache, 1.70 GHz) QDSP-2010: Intel® Core™ i5-4200U Processor (3M Cache, up to 2.60 GHz)
Memory	1x DDR3L SO-DIMM up to 8GB
I/O Panel	<ul style="list-style-type: none"> ■ Front I/O panel <ul style="list-style-type: none"> 1x Phone Jack for Line-Out & MIC-In 1x Push button (w/LED) for power on/off 1x WiFi LED 1x HDD LED 2x USB2.0 4x USB3.0 ■ Rear I/O panel <ul style="list-style-type: none"> 1x DC JACK 2x RJ-45, GbE 1x HDMI 1x DVI-D 1x Reset Button 1x External Power Button Support 1x 3G Antenna (Optional) 1x Kensington Lock Support
Storage	1x mSATA socket mixed with mPCIe
Expansion	mPCIe Socket (with SIM card Support)
Power Supply	Input: 100-240 VAC, 50-60 Hz Output: 65W, +19VDC / 3.42A output
Cooling	CPU System Fan
OS Support	Windows 7 / Windows 8 / Linux
Temperature / Humidity	Operating: 0°C to 50°C, 0%-90%, non-condensing Storage: -20°C to 80°C, 0%-90%, non-condensing
Dimensions	130 x 35 x 111 mm (WxHxD)
Weight	440 g
Mounting	VESA mount (Optional)
Certifications	CE, FCC Class A

Table 1 QDSP-2000 series product specification

■ System tour

Refer to the diagrams below to identify the components of the system.

■ Front Panel

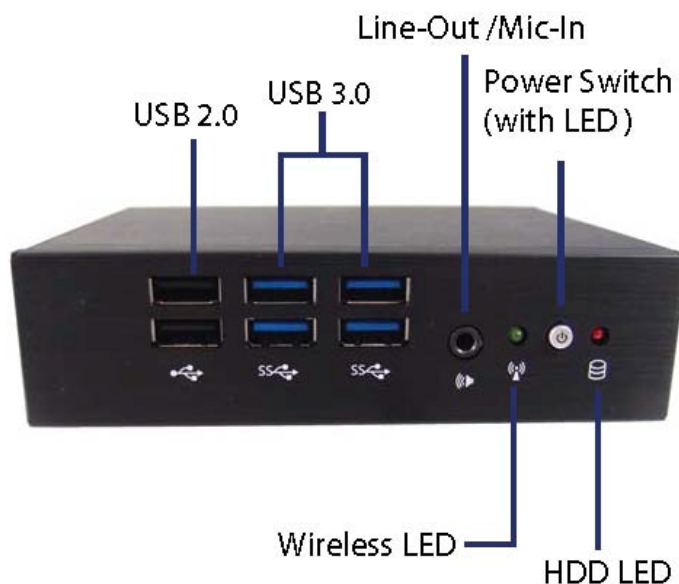


Figure 1 Front Panel

USB

The USB (Universal Serial Bus) port is compatible with USB devices such as keyboards, mouse devices, cameras, and hard disk drives. USB allows many devices to run simultaneously on a single computer, with some peripheral acting as additional plug-in sites or hubs.

WiFi LED

The WiFi LED will light when the WiFi is on.

HDD LED

The hard disk LED blinks when data is being written into or read from the HDD.

Power Switch

The power switch allows powering ON and OFF the system.

■ Rear Panel

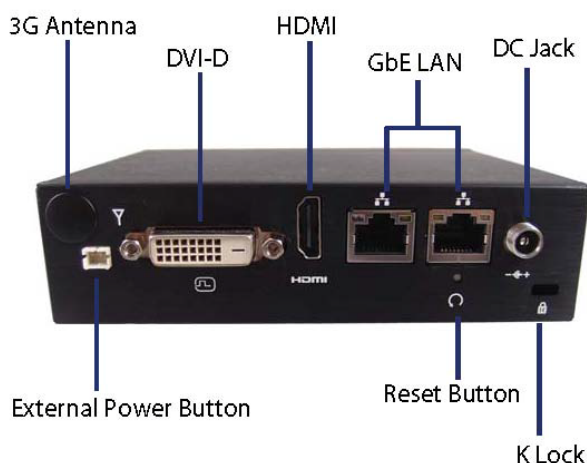


Figure 2 Rear Panel

Ethernet

The eight-pin RJ-45 LAN port supports a standard Ethernet cable for connection to a local network.

DC Jack

The supplied power adapter converts AC power to DC for use with this jack. Power supplied through this jack supplies power to the PC. To prevent damage to the PC, always use the supplied power adapter.

HDMI

HDMI connector for display output

Wireless / 3G

1x reserved holes for wireless/ 3G antenna connection.

Reset Button

1x reset button for clear CMOS.


Kensington Lock Slot

The slot is used for attaching a lock-and-cable apparatus. Locks are generally secured in place with a key or combination lock attached to a rubberized metal cable.

DVI-D

DVI-D is an acronym which means Digital Video Interface Digital. Essentially it is a cable that connects two devices producing an output image on a screen.

Mechanical Dimensions

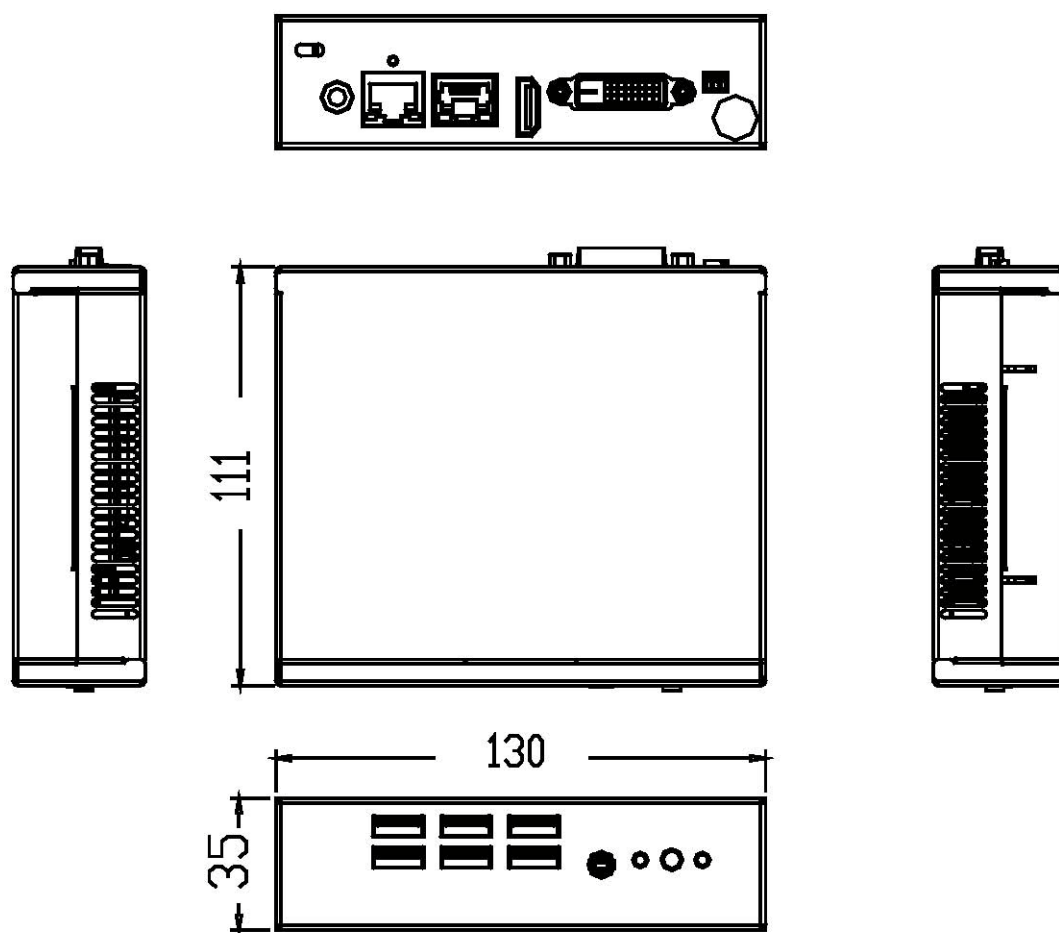

130 x 35 x 111 mm (WxHxD)

Figure 3 Mechanical Dimensions

Chapter 2

Getting Started

- **Setting up your PC**
- **Connecting the monitor**
 - Connect the DVI-D / HDMI cable from your display to the DVI-D / HDMI port.

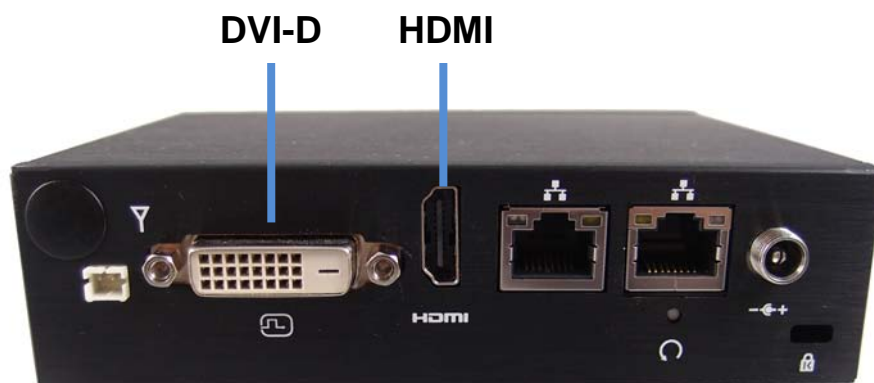


Figure 4 DP/ HDMI

■ Connecting USB mouse & keyboard

Your QDSP-2000 series does not come with a keyboard and mouse, but you can use any USB keyboard or mouse with your computer.

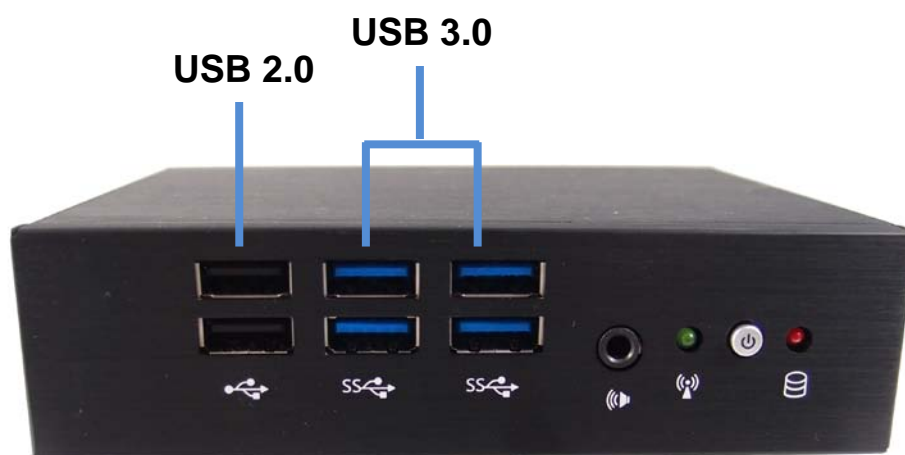


Figure 5 Connecting USB mouse & keyboard

NOTE



Using a third-party USB mouse or keyboard may require software drivers. Check the manufacturer's website for the latest software drivers.

■ Connecting to a network device

Connect one end of a network cable to the LAN port on the system rear panel and the other end to a hub or switch.

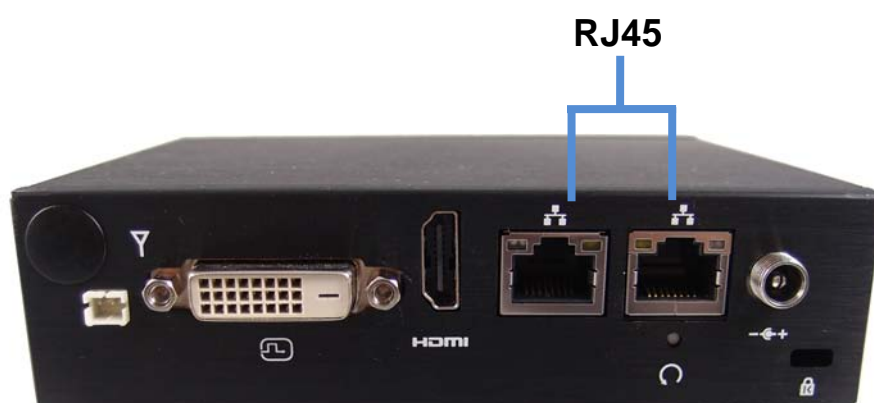


Figure 6 RJ45 connector

■ Turning on the system

1. Connect the power adapter cable to the DC jack (DC IN) of the QDSP-2000 series
2. Connect the power cable to the power adapter
3. Connect the power cable to a power outlet
4. Press the power switch on the front panel to turn on the system



Figure 7 Turning on the system

■ Mounting your PC to a monitor

1. Secure the VESA mounting kit to your monitor with four screws.

NOTE



To fasten the metal shelf, your monitor must comply with VESA75 or VESA100 standard. The VESA mounting kit is optional.

2. Place the QDSP-2000 series on the VESA mounting bracket and make sure the bracket is hooked with the fins of the system housing.
3. Secure the screw with the VESA mounting bracket and make sure the QDSP-2000 series is solidly secured to the display.

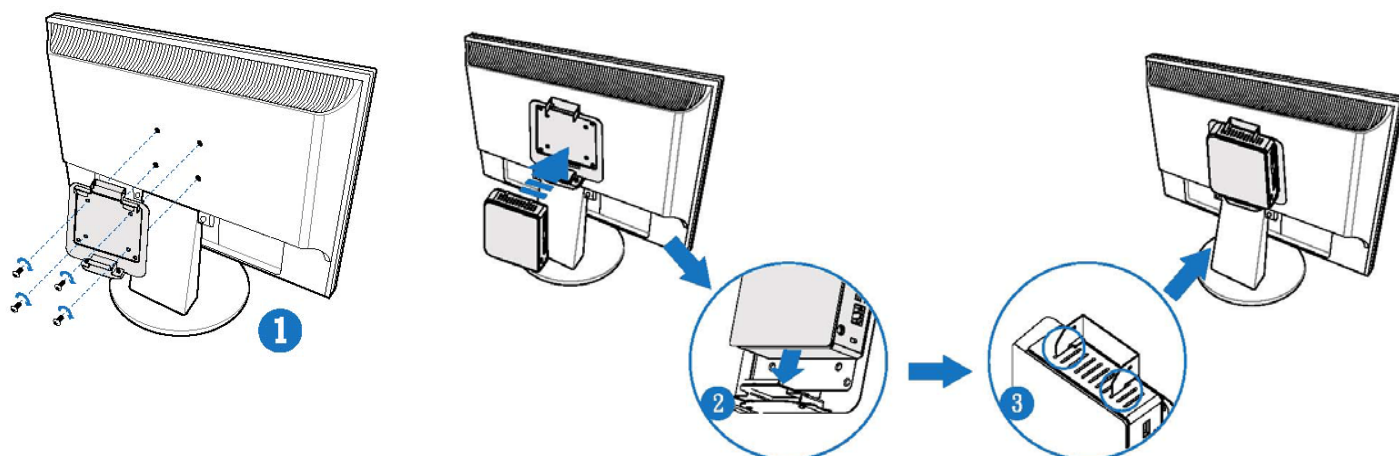


Figure 8 VESA mounting

NOTE



When mounting the unit on the wall with a display. The total weight of the unit and display won't exceed 7 Kg.

■ Anti-theft protection with a Kensington Lock

The QDSP-2000 series has a Kensington lock slot for the Kensington MicroSaver. With the Kensington MicroSaver, a sturdy steel cable, you can attach your QDSP-2000 series to a stationary object and protect your PC from theft.



Figure 9 Use a Kensington lock

Chapter 3

AMI BIOS Setup

■ Overview

This chapter provides a description of the AMI BIOS. The BIOS setup menus and available selections may vary from those of your product. For specific information on the BIOS for your product, please contact us.



NOTE: The BIOS menus and selections for your product may vary from those in this chapter. For the BIOS manual specific to your product, please contact us.

AMI's ROM BIOS provides a built-in Setup program, which allows the user to modify the basic system configuration and hardware parameters. The modified data will be stored in a battery-backed CMOS, so that data will be retained even when the power is turned off. In general, the information saved in the CMOS RAM will not need to be changed unless there is a configuration change in the system, such as a hard drive replacement or when a device is added.

It is possible for the CMOS battery to fail, which will cause data loss in the CMOS only. If this happens you will need to reconfigure your BIOS settings.

■ Main Menu

The BIOS Setup is accessed by pressing the DEL key after the Power-On Self-Test (POST) memory test begins and before the operating system boot begins. Once you enter the BIOS Setup Utility, the Main Menu will appear on the screen. The Main Menu provides System Overview information and allows you to set the System Time and Date. Use the “<” and “>” cursor keys to navigate between menu screens.

Table 2 BIOS Main Menu

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
Product Information				→ ← Select Screen ↑↓ Select Item Enter: Select +- Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4 Save & Exit ESC Exit
Product Name		QDSP-2000 series		
BIOS Version		R0.06 (x64)		
BIOS Build Date		03/04/2014		
ME FW Version		9.5.20.1742		
CPU Information				
Intel® Core® i3-4010U CPU @1.70GHz				
Microcode Revision		17		
Processor Cores		2		
Memory Information				
Total Size		4096 MB (DDR3)		
Frequency		1600 MHz		
System date		[Tue 03/11/2014]		
System time		[14:05:23]		
Access Level		Administrator		
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

■ Advanced Menu

Table 3 Advanced Menu

BIOS SETUP UTILITY		
Main	Advanced	Boot Security Server Mgmt Save & Exit
Onboard LAN 1 Controller	[Enabled]	→ ← Select Screen
Onboard LAN 1 Boot	[Disabled]	↑↓ Select Item
Onboard LAN 2 Controller	[Enabled]	Enter: Select
Onboard LAN 2 Boot	[Disabled]	+ - Change Opt.
Audio Controller	[Enabled]	F1: General Help
> Display Configuration		F2: Previous Values
> CPU Chipset Configuration		F3: Optimized Defaults
> SATA Configuration		F4 Save & Exit
> USB Configuration		ESC Exit
> Intel(R) Rapid Start Technology		
> TPM Configuration		
> H/W Monitor		
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.		

Onboard LAN 1 Controller

Options: Disabled, Enabled

Onboard LAN 1 Boot

Options: Disabled, Enabled

Onboard LAN 2 Controller

Options: Disabled, Enabled

Onboard LAN 2 Boot

Options: Disabled, Enabled

Audio Controller

Options: Disabled, Enabled

Table 4 Advanced Menu – Display Configuration

BIOS SETUP UTILITY	
Main Advanced Boot Security Server Mgmt Save & Exit	
Display Configuration	→ ← Select Screen
UMA Frame Buffer Size [256 MB]	↑↓ Select Item
DVMT Pre-Allocated [64 MB]	Enter: Select
DVMT Total Gfx Mem [256 MB]	+ - Change Opt.
Primary IGFX Boot Display [VBIOS Default]	F1: General Help
	F2: Previous Values
	F3: Optimized Defaults
	F4 Save & Exit
	ESC Exit
Version 2.15.1236. Copyright (C) 2012, American Megatrends, Inc.	

Aperture Size

Options: 128MB, 256MB, 512MB

DVMT Pre-AllocatedOptions: 32 M, 64 M, 96 M, 128MB, 160 M, 192 M, 224 M, 256MB, 288 M,
320 M , 352 M , 384 M , 416 M , 448 M , 480 M , 512M , 1024M**DVMT Total Gfx Mem**

Options: 128MB, 256MB, MAX

IGFX-Boot Type

Options: VBIOS Default, DVI, HDMI

Table 5 Advanced Menu –CPU Chipset Configuration

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
CPU Advanced Configuration			→ ← Select Screen	
EIST		[Enabled]	↑↓ Select Item	
Hyper-Threading		[Enabled]	Enter: Select	
VT-d		[Enabled]	+- Change Opt.	
Active Processor Cores		[ALL]	F1: General Help	
			F2: Previous Values	
			F3: Optimized Defaults	
Limit CPUID Maximum		[Disabled]	F4 Save & Exit	
Execute Disable Bit		[Enabled]	ESC Exit	
Intel Virtualization Technology		[Disabled]		
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

EIST

Options: Disabled, Enabled

Hyper-Threading

Options: Disabled, Enabled

VT-d

Options: Disabled, Enabled

Active Processor Cores

Options: All, 1

Limit CPUID Maximum

Options: Disabled, Enabled

Execute Disable Bit

Options: Disabled, Enabled

Intel Virtualization Technology

Options: Disabled, Enabled

Table 6 Advanced Menu –SATA Configuration

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
SATA Controller(s)		[Enabled]		→ ← Select Screen
SATA Mode Selection		[AHCI]		↑↓ Select Item
SATA Controller Speed		[Gen 2]		Enter: Select
Serial ATA Port 1		Empty		+ - Change Opt.
Port 1		[Enabled]		F1: General Help
mATA Port 1		Empty		F2: Previous Values
Port 1		[Enabled]		F3: Optimized Defaults
				F4 Save & Exit
				ESC Exit
Version 2.15.1236. Copyright (C) 2012, American Megatrends, Inc.				

SATA Controller(s)

Options: Disabled, Enabled

SATA Mode Selection

Options: AHCI

SATA Controller Speed

Options: Default, Gen 1, Gen 2 , Gen 3

Port 1 (For SATA Port / mSATA Port)

Options: Disabled, Enabled

Table 7 Advanced Menu –USB Configuration

BIOS SETUP UTILITY	
Main	Advanced
<div> <div> <div>USB Configuration</div> <div> <div>USB Devices:</div> <div>1 Keyboard, 1 Mouse, 1 Hubs</div> <div>Legacy USB Support</div> <div>USB3.0 Support</div> <div>xHCI Hand-off</div> <div>EHCI Hand-off</div> <div>USB Mass Storage Driver Support</div> </div> <div> <div>[Enabled]</div> <div>[Enabled]</div> <div>[Enabled]</div> <div>[Disabled]</div> <div>[Enabled]</div> </div> </div> <div> <div>→ ← Select Screen</div> <div>↑↓ Select Item</div> <div>Enter: Select</div> <div>+ - Change Opt.</div> <div>F1: General Help</div> <div>F2: Previous Values</div> <div>F3: Optimized Defaults</div> <div>F4 Save & Exit</div> <div>ESC Exit</div> </div> </div>	
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.	

Legacy USB Support

Options: Disabled, Enabled, Auto

USB3.0 Support

Options: Disabled, Enabled

xHCI Hand-off

Options: Disabled, Enabled

EHCI Hand-off

Options: Disabled, Enabled

USB Mass Storage Driver Support

Options: Disabled, Enabled

Table 8 Advanced Menu –Intel (R) Rapid Start Technology

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
Intel (R) Rapid Start Technology			[Disabled]	
Version 2.15.1236. Copyright (C) 2012, American Megatrends, Inc.				

Intel (R) Rapid Start Technology

Options: Disabled, Enabled

Table 9 Advanced Menu –TPM Configuration

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
TPM Configuration			[Disabled]	→ ← Select Screen
Security Device Support				↑↓ Select Item
Current Status Information				Enter: Select
				+ - Change Opt.
				F1: General Help
				F2: Previous Values
				F3: Optimized Defaults
			F4 Save & Exit	
			ESC Exit	
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

Security Device Support

Options: Disabled, Enabled

Table 10 Advanced Menu –H/W Monitor

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
PC Health Status Smart FAN Configuration CPU Temperature : +49 C Memory Temperature : +27 C System Temperature : +26 C CPU FAN Speed N/A +VCORE : +1.712V +VIN : +12.000V 5V : +5.089V +3.3V : +3.356V				→ ← Select Screen ↑↓ Select Item Enter: Select +- Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4 Save & Exit ESC Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

CPU FAN Configuration

FAN Setting **【Manual Mode】** (Options: Smart , Manual)

Manual Duty 255

Table 11 Power Management Configuration

BIOS SETUP UTILITY		
Main	Advanced	Boot Security Server Mgmt Save & Exit
Power Management Configuration		→ ← Select Screen
ACPI Sleep State	[S3 only (Suspend to RAM)]	↑↓ Select Item
Restore AC Power Loss	[Power Off]	Enter: Select
Power Saving Mode	[DeepSx Enabled]	+ - Change Opt.
Resume Event control		F1: General Help
Resume By PCIE Device	[Disabled]	F2: Previous Values
Resume By RTC Alarm	[Disabled]	F3: Optimized Defaults
>Watchdog Timer Configuration		F4 Save & Exit
		ESC Exit
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.		

ACPI Sleep State

Options: Suspend Disabled, S1 only (CPU Stop Clock), S3 only (Suspend to RAM)

Restore AC Power Loss

Options: Power Off, Power On, Last State

Power Saving Mode

Options: Disabled, EUP Enabled, DeepSX Enabled

Resume By PCIE Device

Options: Disabled, Enabled

Resume By RTC Alarm

Options: Disabled, Enabled

Watchdog Timer Configuration

■ **WDT Function** **【Disabled】**

Options: Disabled, Enabled

■ Boot Menu

Table 12 Boot Menu

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
<div>Boot Configuration</div> <div>Full Screen LOGO Display</div> <div>Setup Prompt Timeout</div> <div>Bootup NumLock State</div> <div>CSM Support</div> <div>Boot Option Filter</div> <div>Boot Option Priorities</div> <div> Boot Option # 1</div> <div>Network Device BBS Priorities</div>			<div>→ ← Select Screen</div> <div>↑↓ Select Item</div> <div>Enter: Select</div> <div>+ - Change Opt.</div> <div>F1: General Help</div> <div>F2: Previous Values</div> <div>F3: Optimized Defaults</div> <div>F4 Save & Exit</div> <div>ESC Exit</div>	
Version 2.15.1236. Copyright (C) 2012 American Megatrends, Inc.				

Full Screen LOGO Display

Options: Disabled, Enabled

Bootup Numlock State

Options: On, Off

CSM Support

Options: Disabled, Enabled

Boot Option Filter

Options: UEFI and Legacy, Legacy only, UEFI only

Boot Option # 1

Options: Disabled, IBA GE Slot 00C8 v1410

Network Device BBS Priorities

Options: Disabled, IBA GE Slot 00C8 v1410

■ Security Menu

Table 13 Security Menu

BIOS SETUP UTILITY	
Main	Advanced
Boot	Security
Save & Exit	
<p>Password Description</p> <p>If ONLY the Administrator's password is set, then this only limits access to Setup and is only asked for when entering Setup</p> <p>If ONLY the User's password is set, then this is a power on password and must be entered to boot or enter Setup. In Setup the User will have Administrator rights</p> <p>The password length must be in the following range:</p> <p>Minimum Length 3</p> <p>Maximum length 20</p> <p>Administrator Password</p> <p>User Password</p>	<p>→ ← Select Screen</p> <p>↑↓ Select Item</p> <p>Enter: Select</p> <p>+ - Change Opt.</p> <p>F1: General Help</p> <p>F2: Previous Values</p> <p>F3: Optimized Defaults</p> <p>F4 Save & Exit</p> <p>ESC Exit</p>
Version 2.15.1236. Copyright (C) 2012, American Megatrends, Inc.	

■ Save & Exit Menu

Table 14 Save & Exit Menu

BIOS SETUP UTILITY				
Main	Advanced	Boot	Security	Save & Exit
Save Changes and Reset Discard Changes and Reset Save Options Save Changes Discard Changes Restore Defaults				→ ← Select Screen ↑↓ Select Item Enter: Select +- Change Opt. F1: General Help F2: Previous Values F3: Optimized Defaults F4 Save & Exit ESC Exit
Version 2.15.1236. Copyright (C) 2012, American Megatrends, Inc.				

Save Changes and Exit

Exit system setup after saving the changes. Once you are finished making your selections, choose this option from the Exit menu to ensure the values you selected are saved to the CMOS RAM. The CMOS RAM is sustained by an onboard backup battery and stays on even when the PC is turned off. When you select this option, a confirmation window appears. Select [Yes] to save changes and exit.

Discard Changes and Exit

Exit system setup without saving any changes. Select this option only if you do not want to save the changes that you made to the Setup program. If you made changes to fields other than system date, system time, and password, the BIOS asks for a confirmation before exiting.

Discard Changes

Discards changes done so far to any of the setup values. This option allows you to discard the selections you made and restore the previously saved values. After selecting this option, a confirmation appears. Select [Yes] to discard any changes and load the previously saved values.

Load Optimal Defaults

Load Optimal Default values for all the setup values. This option allows you to load optimal default values for each of the parameters on the Setup menus, which will provide the best performance settings for your system. The F9 key can be used for this operation.

Load Failsafe Defaults

Load Optimal Default values for all the setup values. This option allows you to load failsafe default values for each of the parameters on the Setup menus, which will provide the most stable performance settings. The F8 key can be used for this operation.

Chapter 4

Driver Installation

If your QDSP-2000 series does not come with an operating system pre-installed, you will need to install an operating system and the necessary drivers to operate it. After you have finished assembling your system and connected the appropriate power source, power it up using the power supply and install the desired operating system.

You can download the drivers for the QDSP-2000 from our website and install as instructed there. For other operating systems, please contact us.